




# STEEL CORD BELT CABLE GUM

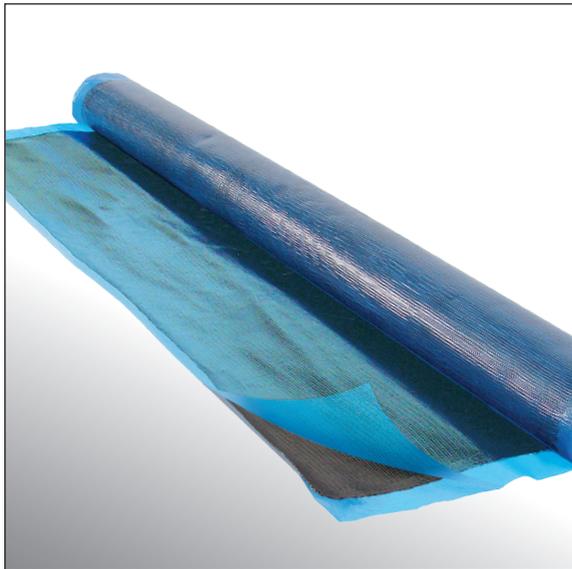

Steel Cord Belt Cable Gum is an uncured rubber for hot vulcanized belt splicing. It is designed to use as an inter-core cord rubber replacement material in splicing steel cord conveyor belts or a tie gum in fabric belts. This material is designed to bond to cured inter-core rubber and wire cords in all standard grade steel cord conveyor belts. Use Steel Cord Belt Cable Gum for fabric belt cured skim rubber and general bond improvement material for general grade fabric conveyor belts.

## FEATURES

- Enhances working life of steel cord belt splices
- Improves flexibility and strength of conveyor belt splices
- Eliminates surface contamination (normal application) with double-sided poly
- Uses poly color coding system to ID compound
- For Natural Rubber (NR), Polyisoprene (IR), Styrene-Butadiene (SBR), Polybutadiene (BR), Polychloroprene i.e. - Neoprene (CR) rubber belt splices

## STEEL CORD BELT CABLE GUM

PRODUCT CODE	POLY COLOR BOTH SIDES	THICKNESS/GAUGE			WIDTH		LENGTH		ROLL WEIGHT	
		FRAC	MM	IN	MM	IN	M	FT	KG	LB
AA-STG-020	Blue	-	.5	.020	1	39	15	49	9	19.8
AA-STG-040	Blue	-	1	.039	1	39	15	49	18	39.6
AA-STG-060	Blue	-	1.5	.059	1	39	15	33	18	39.6
AA-STG-080	Blue	-	2	.079	1	39	8	26	19.2	42.2
AA-STG-100	Blue	-	2.5	.089	1	39	8	26	24	52.8
AA-STG-120	Blue	-	3	.118	1	39	5	16	18	39.6

STEEL CORD BELT CABLE GUM PROPERTIES	
Rubber Color	Black
Poly Liner Color	Blue (double-sided)
Base Polymer	SBR Rubber
Specific Gravity	1.15 - 1.21
Hardness	58 - 68 Shore A
Rubber Tensile	2000 - 2600 psi
Rubber Elongation	300 - 500% (at break)
Shelf Life	6 Months at 70 °F (21 °C) or 12 Months at 50 °F (10 °C)



**Note:** The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.