




# FUSIONWEAR 35

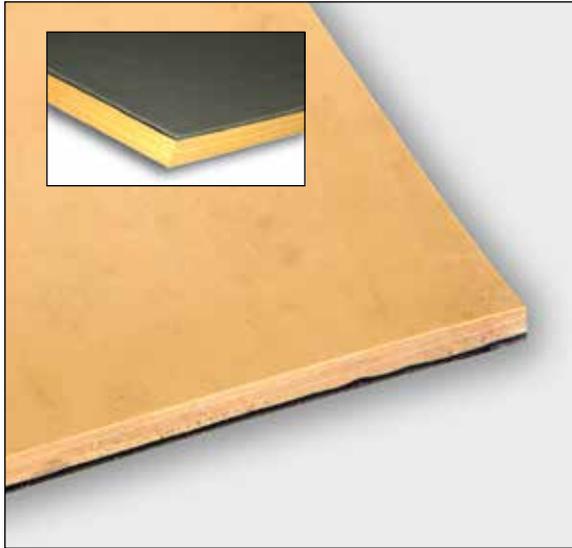

FusionWear 35 is a premium grade pre-cured natural rubber compound, ideal for slurry handling and other wet material handling applications.

## FEATURES

- Specially formulated for superior wear and abrasion resistance properties
- Excellent elasticity and resilience, providing years of economical service in high wear areas
- Is manufactured with a proprietary bonding layer technology, available on one or both sides
- For use with the full range of Fusion Systems cold bonding adhesives
- Proven results in material handling applications such as pipelines, launders, sumps, pumps, hydrocyclones, flotation cells, tank and chute linings
- Available in 10 M length rolls upon request

## FUSIONWEAR 35

PRODUCT CODE	THICKNESS/GAUGE		WIDTH		LENGTH		ROLL WEIGHT	
	MM	IN	M	IN	M	FT	KG	LB
CFW-35SB-1250	3	1/8	1500	59	15.25	50	80	170
CFW-35SB-2550	6	1/4	1500	59	15.25	50	154	340
CFW-35SB-5050	12	1/2	1500	59	15.25	50	308	680
CFW-35SB-7550	20	3/4	1500	59	15.25	50	515	1135
CFW-35SB-1050	25	1	1500	59	15.25	50	616	1358

FUSIONWEAR 35 PROPERTIES		
Colour	Tan	
Elastomer	NR	
Tensile Strength	19 Mpa	
Elongation at Break	650%	
Density	1.00 g / cm <sup>3</sup>	
Hardness	38 (-3) Shore A	
Abrasion Resistance	85 mm <sup>3</sup> @ 5 N	
Resilience	70%	



**Note:** The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.