


MIDI-FOREST

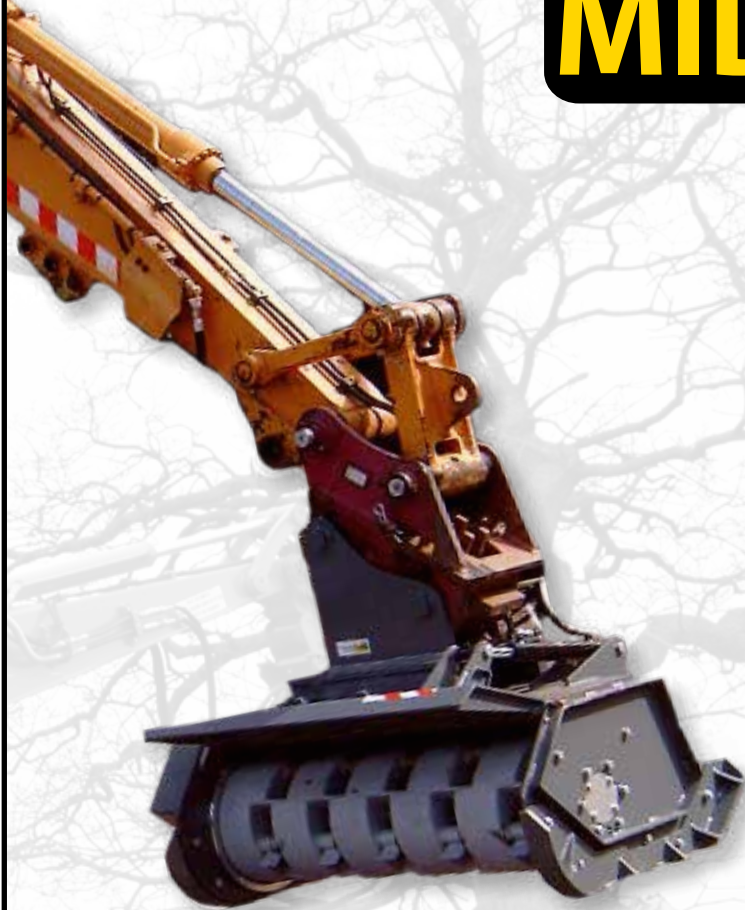

Vegetation Control
Site Clearance
Thinning Operations
Embankment Maintenance
Whole Trees, Scrub, Grass
Boundary Restoration
Woodland Maintenance

- Available with **Drum Rotor** or **Fixed Tool Rotor**
- To suit excavators from 12 tonnes to 18 tonnes (std configuration) also available for tractors , loaders and skid steers
- Cut capability for grass and vegetation up to 300mm diameter (350mm diameter for fixed tool rotor)
- Heavy duty casing manufactured from Weldox 700 steel for maximum strength and durability.
- Internal frame and counter blades manufactured from Hardox 400
- Piston motor gives optimum power output.
- Multi-belt transmission
- Hydraulic operation of front cover

“Perfect Partners”



The Attachment Specialist

Exac-One Ltd
 The Mount Buildings
 Upton on Severn
 Worcs
 WR8 0QL
 United Kingdom

Tel: +44(0)1684 593052
 Fax: +44(0)1684 592249
 info@exac-one.co.uk
 www.exac-one.co.uk
 May 2016

Technical Drum Rotor

		TF 100 M	TF 130 M	TF 160 M
Excavator Weight Range	tonnes	10-12	12-15	16-18
Mulcher Weight w/o Bracket	kg	860	940	1050
Oil flow requirement	l/min	120-130	120-130	120-130
Max Hyd Circuit pressure	bar	220-250	220-250	230-250
Cut width	mm	1050	1300	1600
Max cut diameter	mm	200	200	200
Rotor type		Drum Rotor	Drum Rotor	Drum Rotor
Standard motor size	cc	56	56	56
Total Width	mm	1250	1500	1800

Fixed Tool Rotor

		TF 100 M UX	TF 130 M UX	TF 160 M UX
Excavator Weight Range	tonnes	10-12	12-15	16-18
Mulcher Weight w/o Bracket	kg	890	970	1120
Oil flow requirement	l/min	120-130	120-130	120-130
Max Hyd Circuit pressure	bar	220-250	220-250	220-250
Cut width	mm	1050	1300	1600
Max cut diameter	mm	250	250	250
Rotor type		Fixed Tool	Fixed Tool	Fixed Tool
Standard motor size	cc	56	56	56
Total Width	mm	1250	1500	1800