




## FABRIC BELT TIE GUM

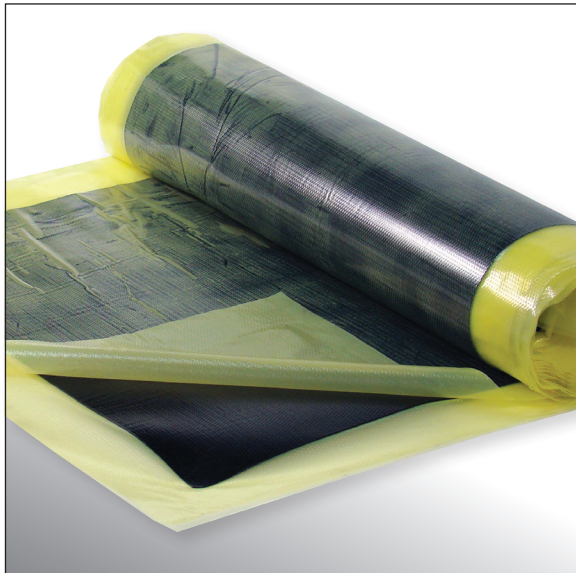

Fabric Belt Tie Gum is an uncured rubber for hot vulcanized belt splicing. It is designed for use as a skim rubber replacement material when splicing fabric conveyor belts. The material is designed to bond all standard grades of fabric conveyor belts.

### FEATURES

- Enhances working life of fabric belt splices
- Improves flexibility and strength of conveyor belt splices
- Eliminates surface contamination (normal application) with double-sided poly
- Uses poly color coding system to ID compound
- For Natural Rubber (NR), Polyisoprene (IR), Styrene-Butadiene (SBR), Polybutadiene (BR), Polychloroprene i.e. - Neoprene (CR) rubber belt splices

## FABRIC BELT TIE GUM

PRODUCT CODE	POLY COLOR BOTH SIDES	THICKNESS/GAUGE			WIDTH		LENGTH		ROLL WEIGHT	
		FRAC	MM	IN	MM	IN	M	FT	KG	LB
AA-FBG-020	Yellow	-	.5	.020	.5	20	15	49	4.4	9.7
AA-FBG-030	Yellow	-	.7	.028	.5	20	15	49	6.1	13.5
AA-FBG-040	Yellow	-	1	.039	.5	20	15	49	8.8	19.3
AA-FBG-060	Yellow	-	1.5	.059	.5	20	15	49	13.2	29
AA-FBG-080	Yellow	-	2	.079	.5	20	10	33	11.7	25.7

FABRIC BELT TIE GUM PROPERTIES	
Rubber Color	Black
Poly Liner Color	Yellow (double-sided)
Base Polymer	NR Rubber
Specific Gravity	1.15 - 1.21
Hardness	65 - 75 Shore A
Rubber Tensile	2500 - 3000 psi
Rubber Elongation	300 - 500% (at break)
Shelf Life	6 Months at 70 °F (21 °C) or 12 Months at 50 °F (10 °C)



**Note:** The above data is based on extensive testing and represents standard values. Shaw Almix Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.