




FUSIONWEAR 45

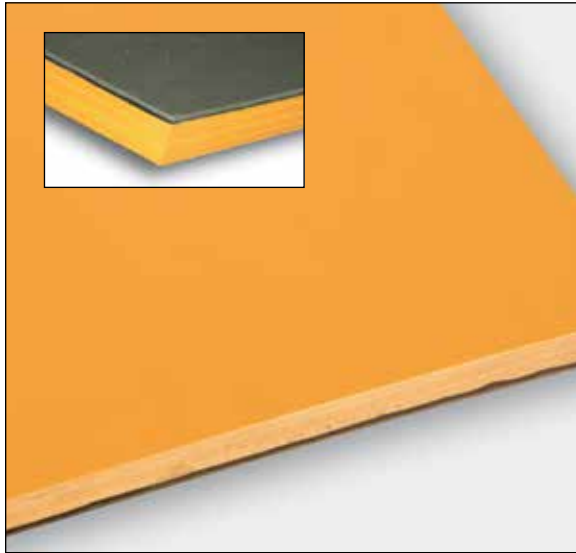

FusionWear 45 is a premium quality natural rubber compound, ideal for both wet and dry abrasive applications.

FEATURES

- Outstanding resilience and resistance to wet abrasion and cutting wear
- Is manufactured with a proprietary bonding layer technology, available on one or both sides
- For use with the full range of Fusion Systems cold bonding adhesives
- Proven results in handling applications such as slurries, pipelines, launders, sumps, pumps, hydrocyclones, flotation cells, tank and chute linings as well as bend and snub pulley linings
- Available in 10 M length rolls upon request

FUSIONWEAR 45

PRODUCT CODE	THICKNESS/GAUGE		WIDTH		LENGTH		ROLL WEIGHT	
	MM	IN	MM	IN	M	FT	KG	LB
CFWO-40SB-1250	3	1/8	1500	59	15.25	50	81	175
CFWO-40SB-2550	6	1/4	1500	59	15.25	50	163	358
CFWO-40SB-3750	10	3/8	1500	59	15.25	50	244	537
CFWO-40SB-5050	12	1/2	1500	59	15.25	50	325	716
CFWO-40SB-7550	20	3/4	1500	59	15.25	50	541	1190
CFWO-40SB-1050	25	1	1500	59	15.25	50	659	1450
CFWO-40SB-2050	50	2	1500	59	5	16.5	220	480

FUSIONWEAR 45 PROPERTIES			
Colour	Orange		
Elastomer	NR Blend		
Tensile Strength	20 Mpa	2900 psi	DIN 53504
Elongation at Break	600%		DIN 53504
Density	1.02 g / cm ³		DIN 53505
Hardness	45 (±5) Shore A		DIN 53505
Abrasion Resistance	65 mm ³ @ 5 N		DIN 53516



Note: The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.