




# FUSION COMBI SCRAPER 65/45/65

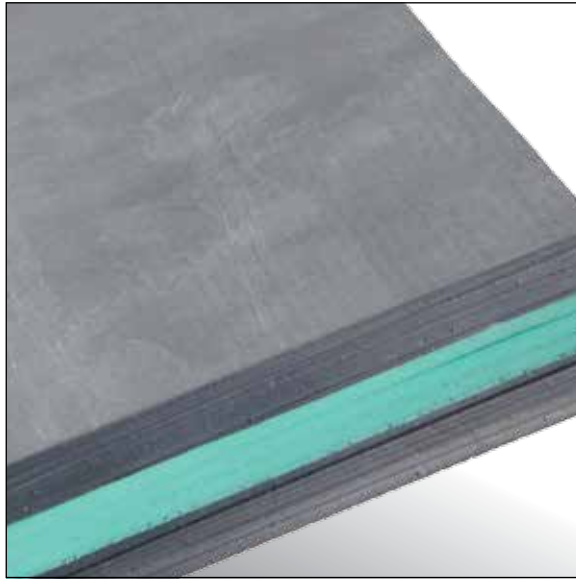

Fusion Combi 65/45/65 is a vulcanized laminate of two hard outer layers, containing a softer green inside layer. Perfect for finer slurry type applications.

## FEATURES

- Twice the wear life of commercial SBR rubber
- Produced with the finest natural rubber
- Multi-layer construction provides long wear life with excellent cleaning capabilities
- Hard outside layers provide wear and rigid stability
- Soft inside layer provides superior squeegee type cleaning

## FUSION COMBI SCRAPER 65/45/65

PRODUCT CODE	THICKNESS/GAUGE		WIDTH		ROLL LENGTH		ROLL WEIGHT	
	MM	IN	M	IN	M	FT	KG	LB
CCR-6545-7506	20	.75	150	6	15.25	50	34	75
CCR-6545-7508	20	.75	200	8	15.25	50	43	95
CCR-6545-755950	20	.75	1500	59	15.25	50	331	730
CCR-6545-1006	25	1	150	6	15.25	50	42	92
CCR-6545-1008	25	1	200	8	15.25	50	54	118
CCR-6545-105950	25	1	1500	59	15.25	50	410	905
CCR-6545-1506	40	1.5	150	6	5	16.5	34	75
CCR-6545-1508	40	1.5	200	8	5	16.5	45	98

FUSION COMBI SCRAPER 65/45/65 PROPERTIES		
Colour	Black	Green
Elastomer	NR/BR	NR
Tensile Strength	28 Mpa	22.5 Mpa
Elongation at Break	500%	600%
Density	1.12 g / cm <sup>3</sup>	1.10 g / cm <sup>3</sup>
Hardness	60 (±5) Shore A	45 Shore A
Abrasion Resistance	90 mm <sup>3</sup>	65 mm <sup>3</sup>



**Note:** The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.