



GRM RUBBER TO METAL PRIMER

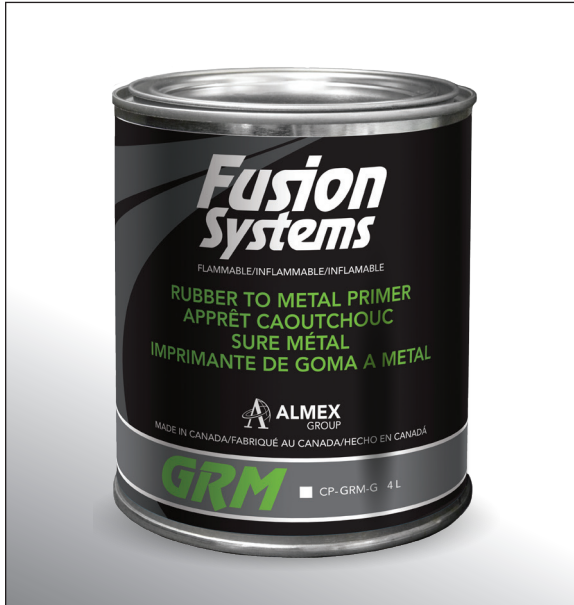


Photo shows .94L / .25 gal.

GRM is an ideal metal primer for use in rubber tanks or chute lining, pulley lagging, and all applications where a bond to metal requires superior adhesion.

FEATURES

- As an interface between rubber and metal, GRM offers high bond strengths between both surfaces
- GRM utilizes polymers and organic compounds to achieve a high strength bond, unlike zinc based primers
- Mixture of polymers, organic compounds and mineral fillers dissolved or dispersed in an organic solvent system
- Can be used on steel, aluminum, titanium, wood and other substrates
- Can be applied with a brush, roller or spray

GRM RUBBER TO METAL PRIMER

PRODUCT CODE	VOLUME		WEIGHT		COVERAGE	
	LITER	GAL	KG	LBS	M ²	FT ²
CP-GRM-Q	.94	.25	.7	1.5	13.7	147
CP-GRM-G	3.78	1	3.5	7.5	54.9	588

GRM PROPERTIES	
Colour	Green
Flash Point	5.5 °C / 42 °F
Shelf Life	12 months from date of manufacture 21 °C to 26 °C / 70 °F to 80 °F
Solvent	M.E.K. / Xylene / IPA



Note: The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.