




INFINITY

LIGHTWEIGHT PRESS

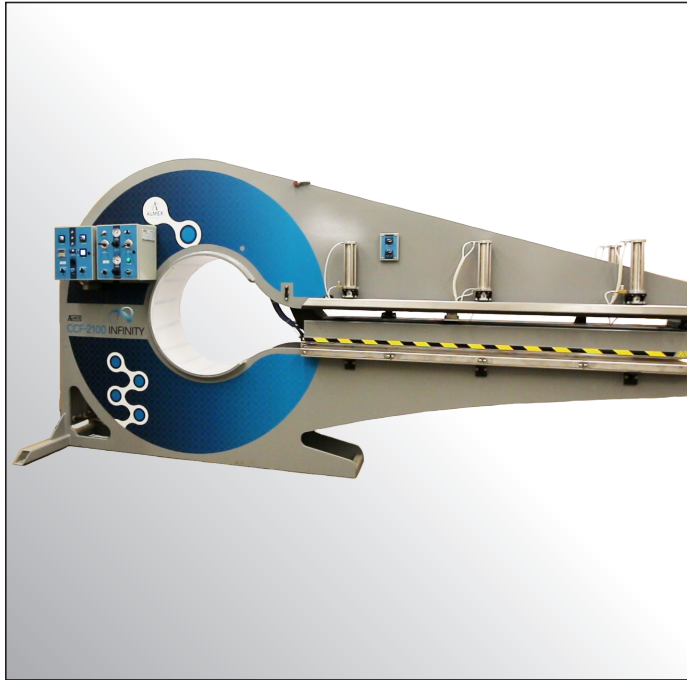

The Infinity Lightweight Vulcanizing Press is designed for longitudinal and production splicing of lightweight conveyor belts. It can be moved anywhere in the shop and is easily stored due to its small footprint.

FEATURES

- Extremely fast heat up: 10 minutes
- Water-cooled
- Versatile 2,000mm splice
- Infinite length without interference
- Clamp feature without interference
- Two-station clamp control
- 45 psi pressure
- Pneumatic Belt clamp with separate operating function
- Available in various voltages

SPECIFICATIONS

- **PLATEN** Rectangular size: 8"x 83", one inch cold zone for smooth transition as belt moved through the press. Floating lower platen.
- **FRAME** Steel Cantilever Frame Style CCF200-2110T3T(C).
- **CONTROL PANEL** T3T solid state controls c/w Omron digital indication with plug C. deg., digital temperature meter, including thermo couple leads & connector to panel. Air control panel for hinging & locking pressurization.
- **PRESSURE/COOLING** Operating pressure of 45 psi. Uniform pressure guaranteed with Almex pressure bag (air pressure). Press cooled by rapid intergral water cooling. Downstroking pressure.



Note: The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.